

G-6053-C14U



Information

- Wall-mounted spout installation
- Wall-mounted handle installation
- Roman Tub Spout Flow Rate ~9.5 gpm @60 psi
- 8-3/14" spout reach
- Optional in-line pressure balancing valve







Steelnox® (Satin Nickel)





Product Features

- Wall-mounted spout installation
- Wall-mounted handle installation
- Roman tub spout flow rate ~9.5 gpm @60 psi
- 8-3/14" spout reach
- Optional in-line pressure balancing valve


Available Finishes

- Polished Chrome G-6053-C14U
- Steelnox
 G-6053-C14U

Warranty

Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/faqs

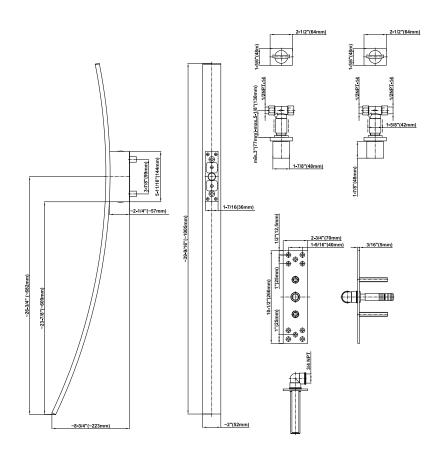



C14U-BS













Steelnox® (Satin Nickel)

C14U-BS, VS, WS LUNA, SADE, TARGA Series

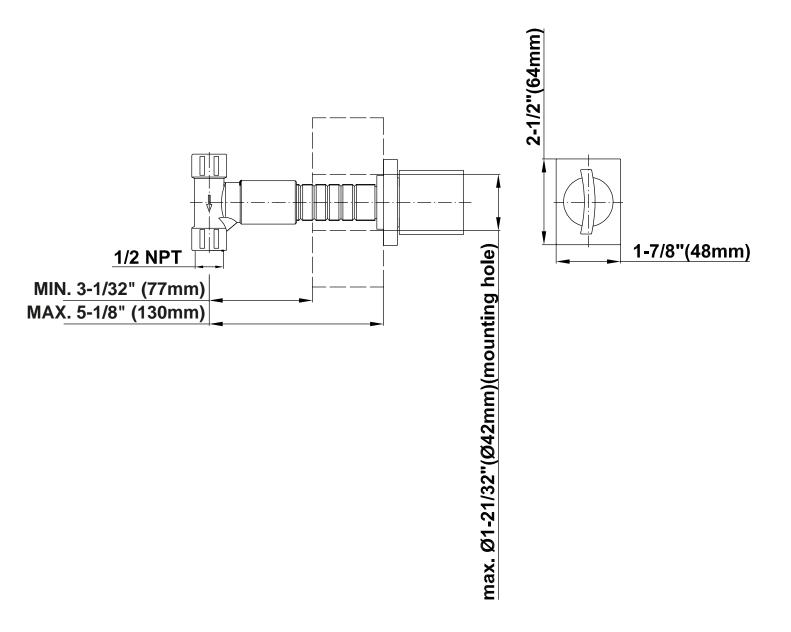





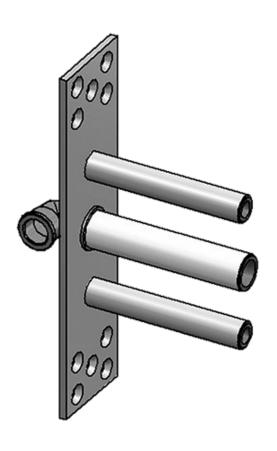




Polished Chrome



SteeInox® (Satin Nickel)






Product Features

• Spout connection rough

Warranty

• Limited lifetime warranty

For complete warranty information go to www.graff-faucets.com/en-nam/warranty

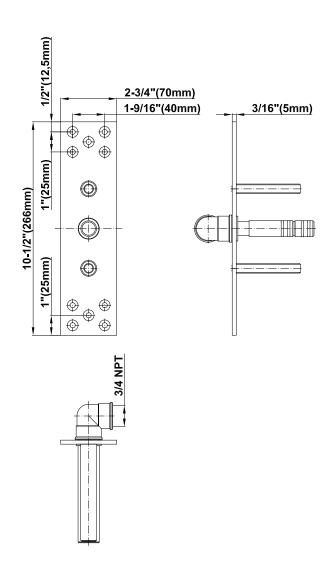





Information

• Wall-mounted spout installation



Polished Chrome



Steelnox® (Satin Nickel)





Product Features

- Wall-mounted spout installation
- Trim only

Available Finishes

- Polished Chrome G-6000-PC-T
- Steelnox® G-6000-SN-T

Warranty

• Limited lifetime warranty

For complete warranty information go to www.graff-faucets.com/en-nam/warranty

