




Information

- Floor-mount installation
- Aerated spout flow rate ~7 gpm @ 45 psi
- Handshower flow rate ≤1.5 max gpm
- 8-7/8" spout reach
- 38-1/16"-41-1/4" approximate height
- Includes handshower with 59" spiral flexible hose (PVD finishes use 59" flex hose)
- Optional in-line pressure balancing valve
- ADA

Finishes





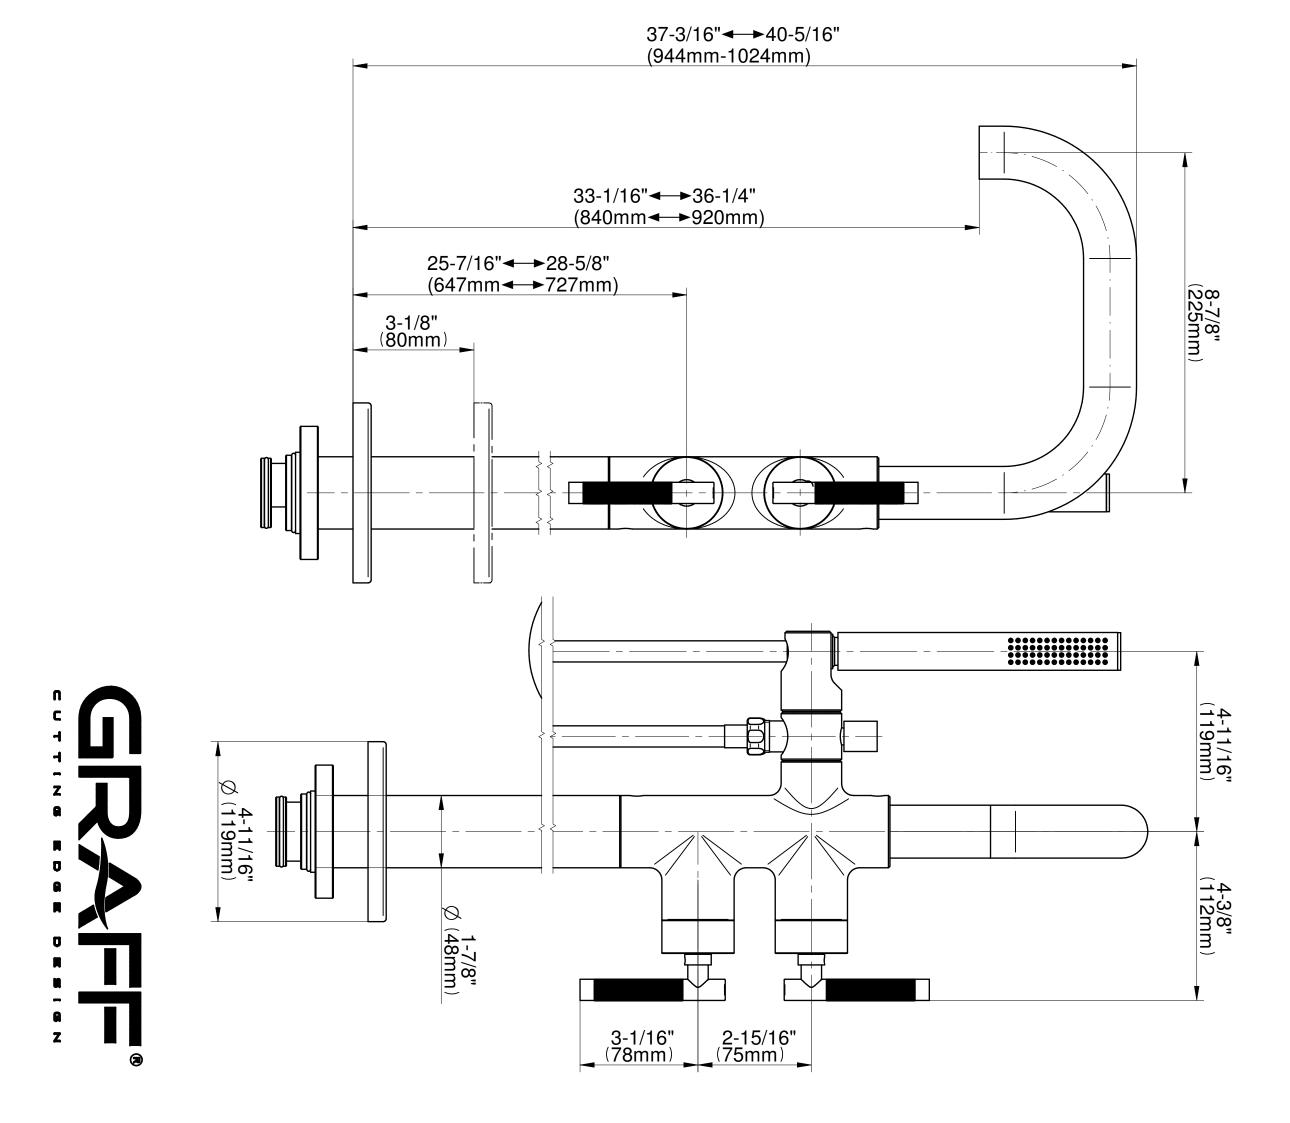





Finishes



Gold



Gold



Gold/Onyx **PVD®**



24K Polished 24K Brushed 24K Brushed Brushed Brass Architectural **PVD®**



Black™



Brushed Nickel



Brushed Onyx **PVD®**



Gunmetal **PVD®**





Matte Black Olive Bronze Onyx PVD® Polished Brass





 PVD^{\circledR}



Polished Chrome



Polished Chrome/Onyx **PVD**® Accents



Polished Nickel



Polished Nickel/Onyx **PVD**® Accents








Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

• Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

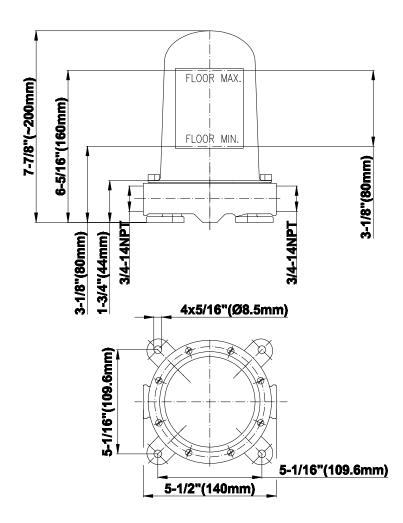





Information

- Floor-mount installation
- Aerated spout flow rate ~7 gpm @ 45 psi
- Handshower flow rate ≤1.5 max gpm
- 8-7/8" spout reach
- 38-1/16"-41-1/4" approximate height
- Includes handshower with 59" spiral flexible hose (PVD finishes use 59" flex hose)
- Optional in-line pressure balancing valve
- ADA

Finishes





