


Information

- Floor-mount installation
- Aerated spout flow rate ~7 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 8-3/16" spout reach
- 34-15/16" 40-1/2" approximate height
- Includes handshower with 59" spiral flexible hose


Accents

- Optional in-line pressure balancing valve
- ADA


Finishes

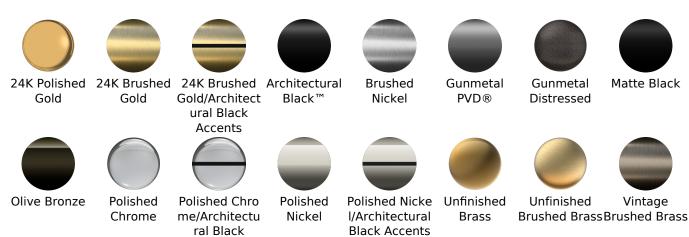



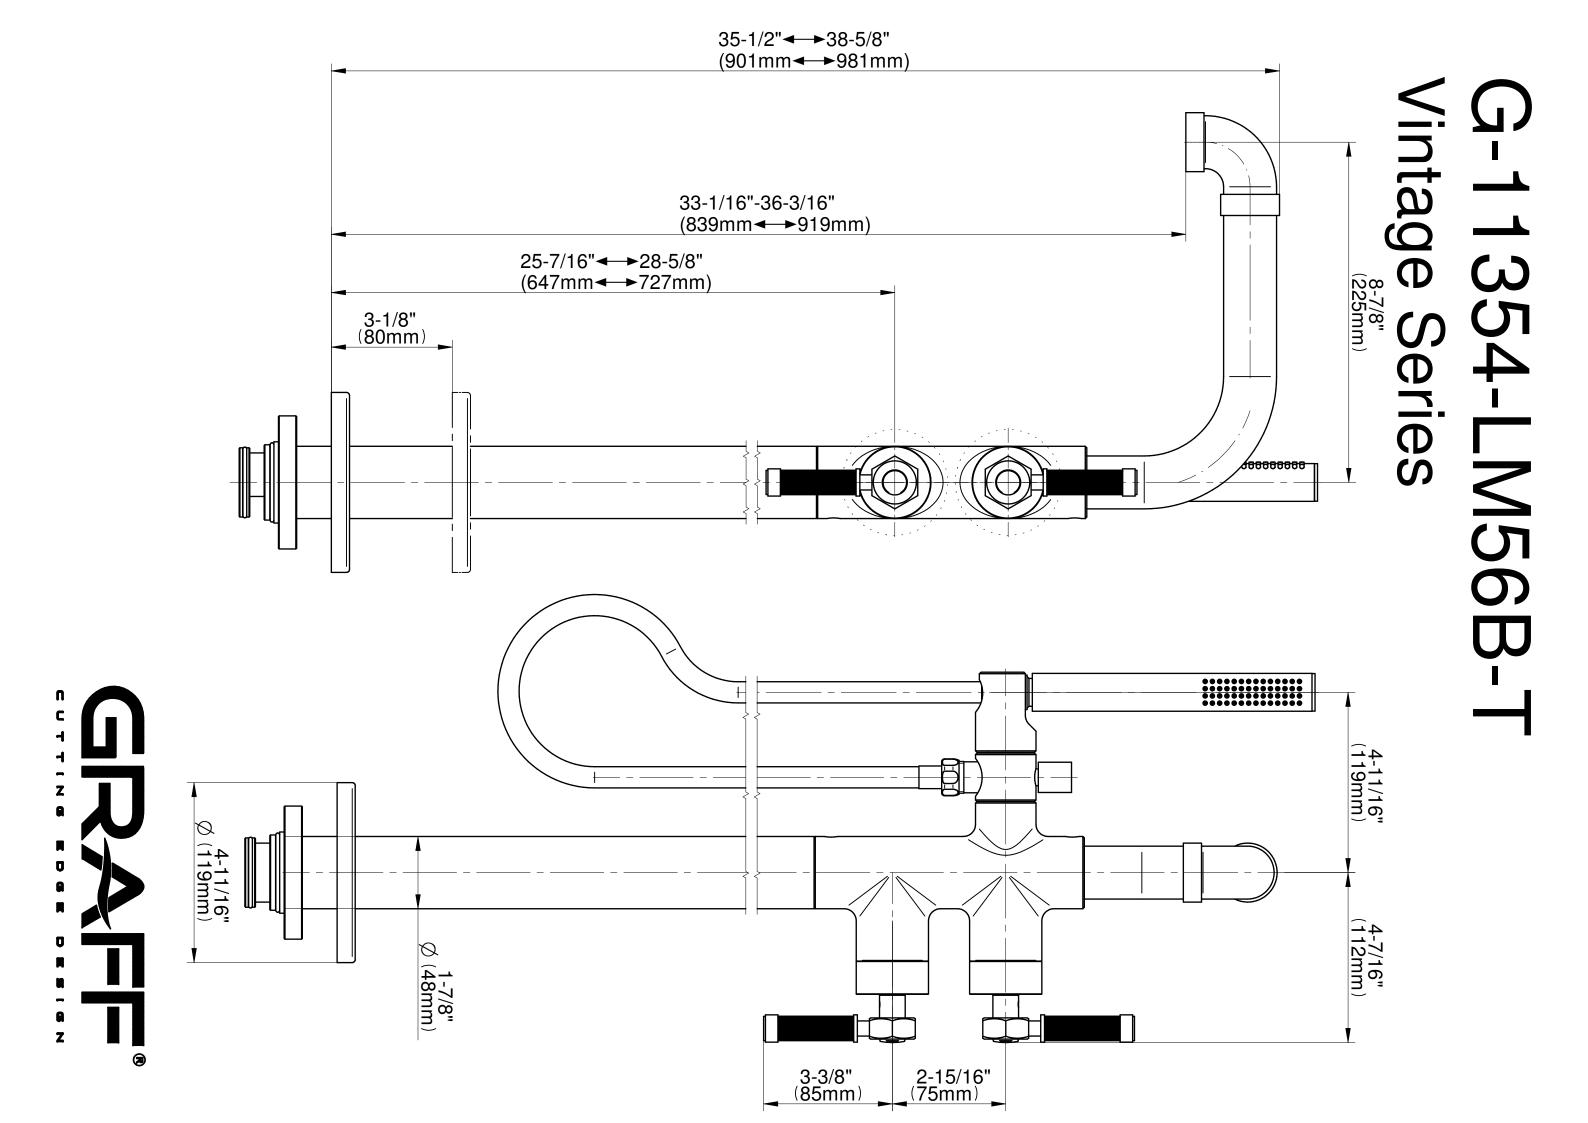



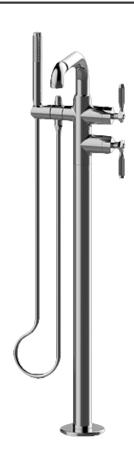


Information

- Floor-mount installation
- Aerated spout flow rate ~7 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 8-3/16" spout reach
- 34-15/16" 40-1/2" approximate height
- Includes handshower with 59" spiral flexible hose


Accents

- Optional in-line pressure balancing valve
- ADA

Finishes

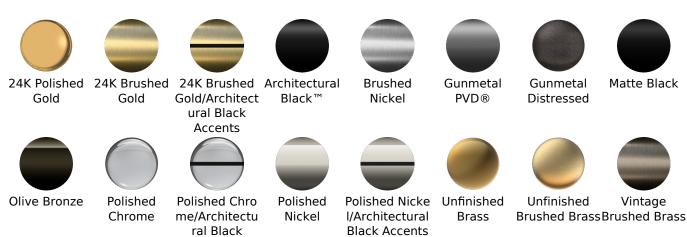



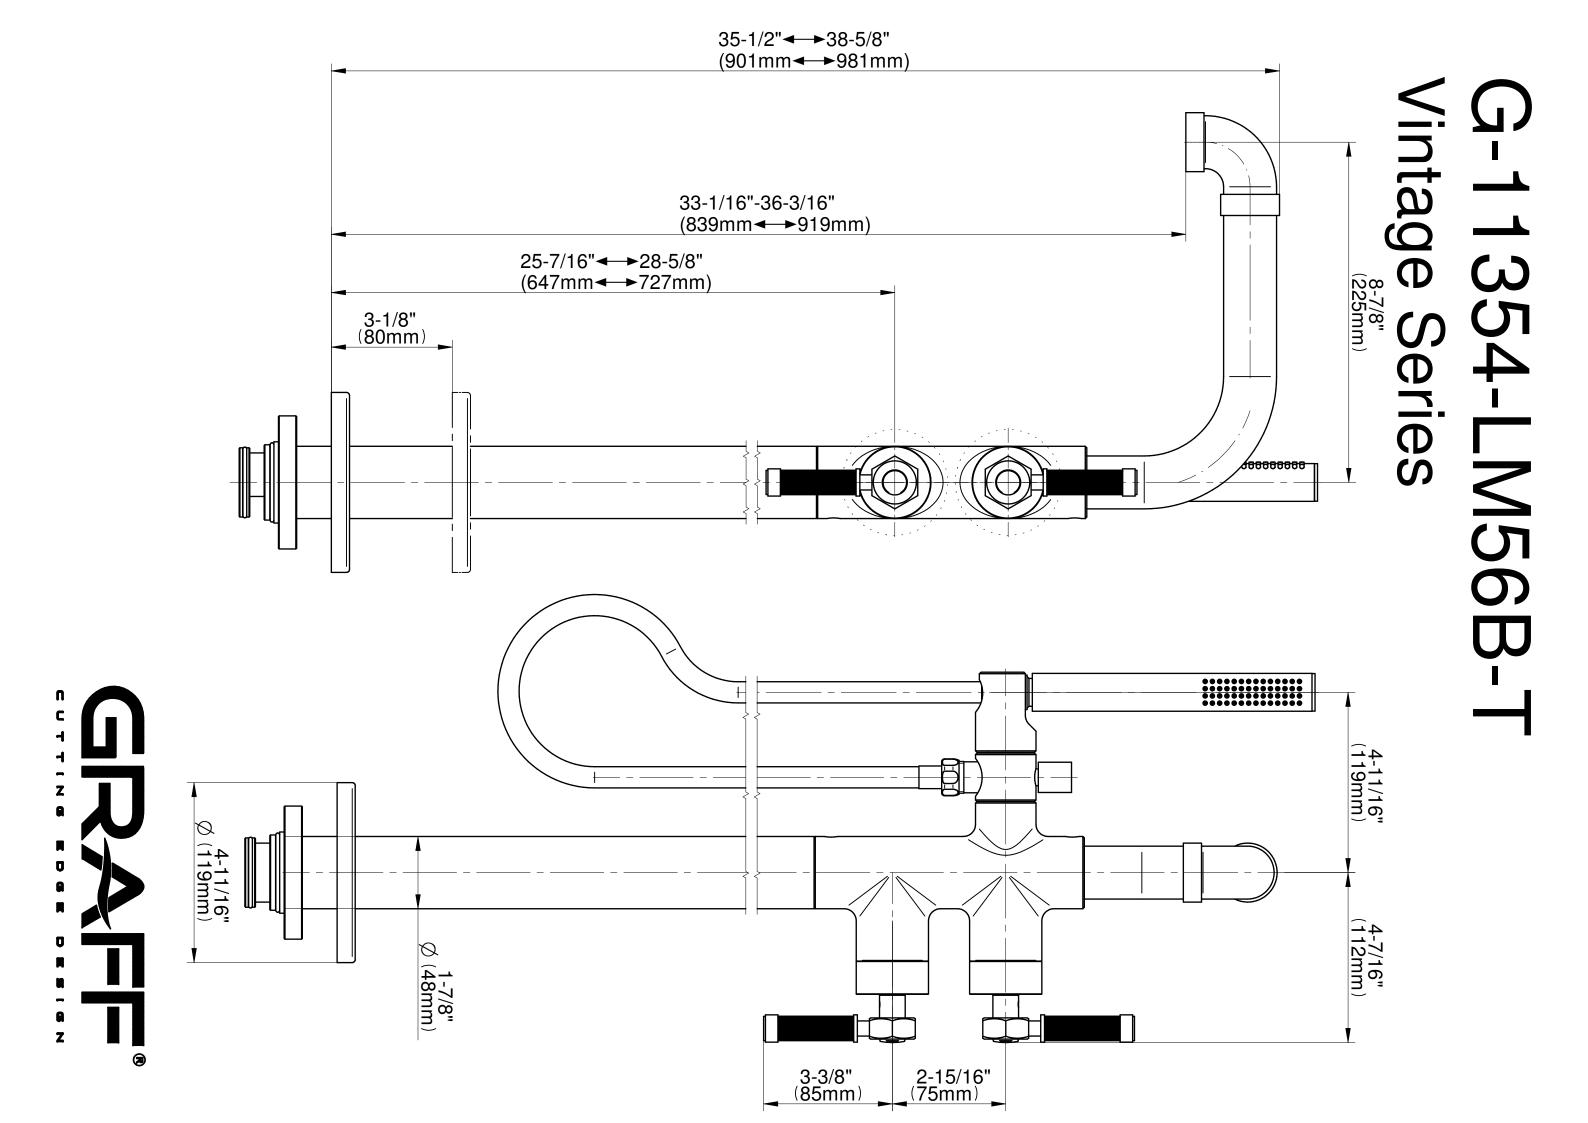





Finishes



Gold



Gold



24K Polished 24K Brushed 24K Brushed Architectural Gold/Architect ural Black



Black™



Brushed Nickel



Gunmetal **PVD®**



Gunmetal Distressed



Matte Black



Olive Bronze



Polished Chrome



Polished Chro me/Architectu ral Black Accents



Polished Nickel



Polished Nicke I/Architectural **Black Accents**



Unfinished Brass



Unfinished



Brushed BrassBrushed Brass



White





Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

• Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

