


G-6654-LM45N

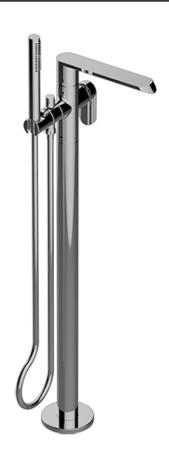

Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Aerated handshower flow rate ≤1.5 max gpm
- 7-13/16" spout reach
- 31-1/8" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Finishes







24K Polished 24K Brushed Architectural Black™ Gold



Brushed Nickel



Matte Black Olive Bronze



Polished Chrome




Polished Nickel



Architectural White



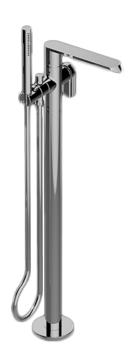

Product Features

- Floor-mount installation
- Aerated flow rate ~8 gpm @ 45 psi
- Aerated handshower flow rate ≤
 1.5 max gpm
- 7-13/16" spout reach
- 31-1/8" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Code Compliance

- ADA
- CALGreen


Available Finishes

- Polished Chrome
 G-6654-LM45N-PC
- Brushed Nickel
 G-6654-LM45N
- Polished Nickel
 G-6654-LM45N-PN
- Olive Bronze
 G-6654-LM45N-OB

Warranty

• Limited lifetime warranty

For complete warranty information go to www.graff-faucets.com/en-nam/warranty

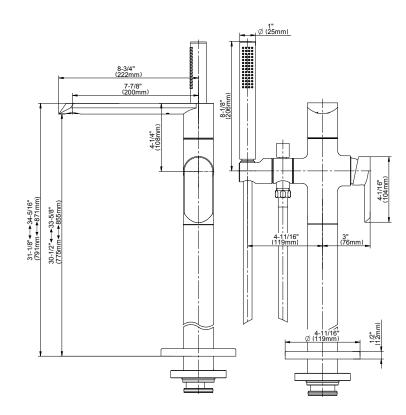

^{*} Special order finish- call for availability





Finishes



Gold



Gold



24K Polished 24K Brushed Architectural Black™



Brushed Nickel





Matte Black Olive Bronze



Chrome



Polished Nickel



White






Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty


• Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

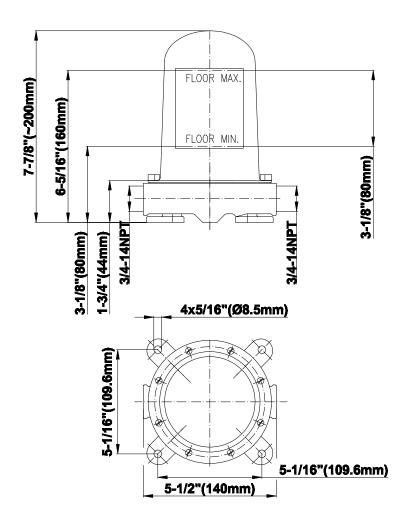



G-6654-LM45N

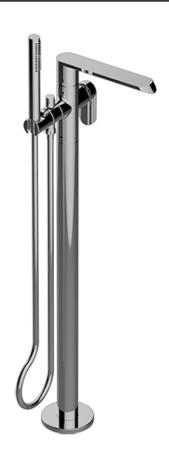

Information

- Floor-mount installation
- Aerated spout flow rate ~8 gpm @ 45 psi
- Aerated handshower flow rate ≤1.5 max gpm
- 7-13/16" spout reach
- 31-1/8" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Finishes







24K Polished 24K Brushed Architectural Black™ Gold



Brushed Nickel



Matte Black Olive Bronze



Polished Chrome



Polished Nickel



Architectural White





Product Features

- Floor-mount installation
- Aerated flow rate ~8 gpm @ 45 psi
- Aerated handshower flow rate ≤
 1.5 max gpm
- 7-13/16" spout reach
- 31-1/8" to 34-5/16" approximate height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Code Compliance

- ADA
- CALGreen

Available Finishes

- Polished Chrome G-6654-LM45N-PC
- Brushed Nickel
 G-6654-LM45N
- Polished Nickel
 G-6654-LM45N-PN
- Olive Bronze
 G-6654-LM45N-OB
 - * Special order finish- call for availability

Warranty

• Limited lifetime warranty

For complete warranty information go to www.graff-faucets.com/en-nam/warranty

